

# PT9200SL

## GE Profile™ Series 30 in. Built-In Twin Flex Convection Wall Oven

### DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

**MOST 30" WALL CABINETS CAN BE USED WITH THIS UNIT.**

**APPROVED INSTALLATIONS:** Above Warming Drawer, Below Built-in Microwave or Advantium®, Side-by-Side, and Under Counter

**NOTE:** These ovens are not approved for stacking one single wall oven over another single wall oven. Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.


Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

Side-by-side installations require at least 2" between cutouts.

Approved cooktops for installation above this wall oven: CHP9536, PHP9036, CHP9530, PHP9030, JP3536, JP3036, JP3530, JP3030


**IMPORTANT:** Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

**IMPORTANT:** Before installing, consult installation instructions packed with product for current dimensional data.

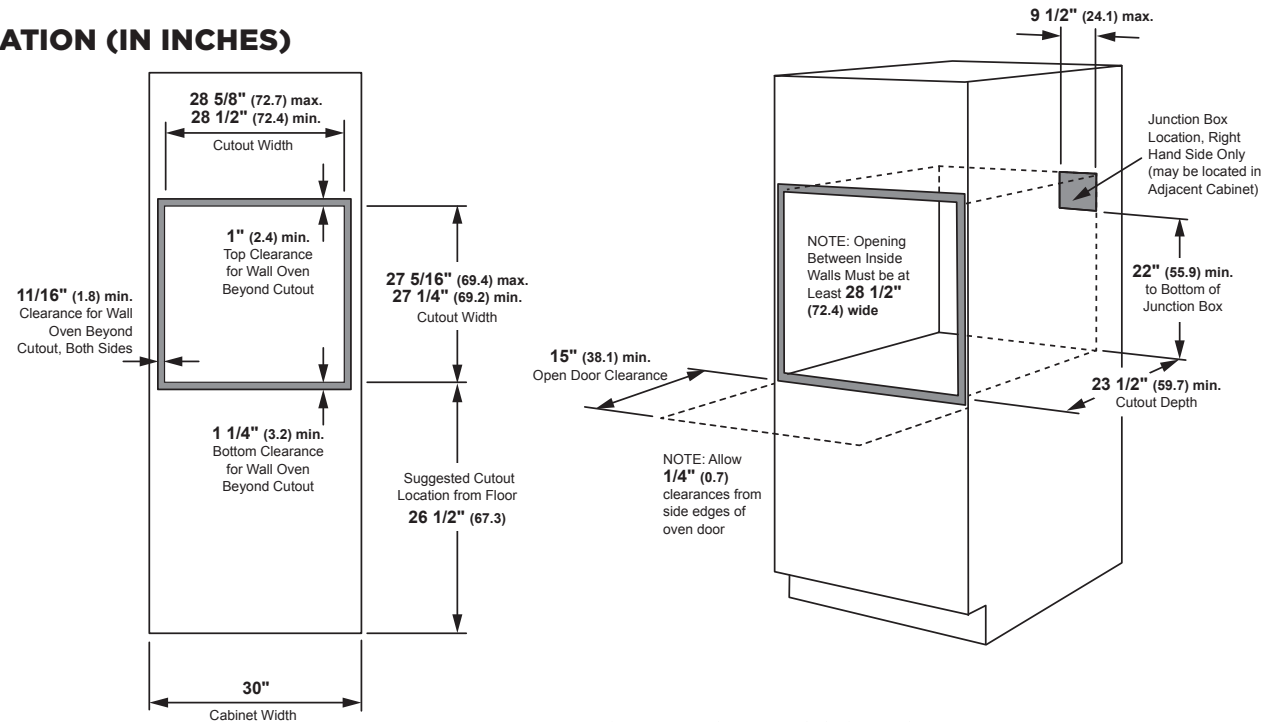

### INSTALLATION BELOW A COOKTOP

KW RATING	
240V	4.0
208V	3.0
BREAKER SIZE	
240V	20 Amps
208V	20 Amps

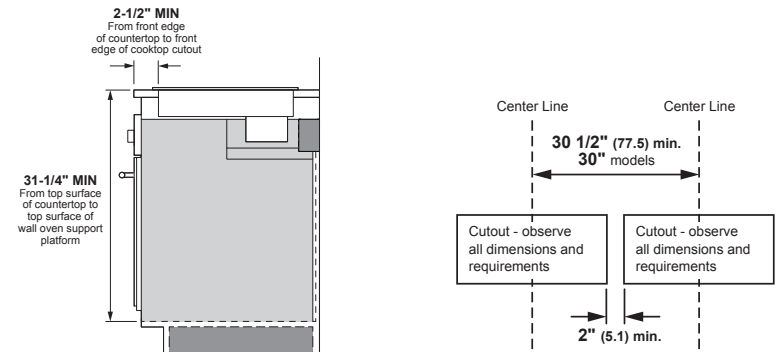

For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.



Listed by Underwriters Laboratories



